



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number : 0 367 285 B1

(12)

## EUROPEAN PATENT SPECIFICATION

(43) Date of publication of patent specification :  
17.03.93 Bulletin 93/11

(51) Int. Cl.<sup>5</sup> : A61M 16/00, A61M 16/20

(21) Application number : 89120394.5

(22) Date of filing : 03.11.89

(54) Disposable resuscitator.

(30) Priority : 04.11.88 DK 6196/88

(43) Date of publication of application :  
09.05.90 Bulletin 90/19

(45) Publication of the grant of the patent :  
17.03.93 Bulletin 93/11

(84) Designated Contracting States :  
DE FR GB IT SE

(56) References cited :  
EP-A- 0 139 363  
CH-A- 293 574  
GB-A- 2 139 099  
US-A- 3 083 707

(56) References cited :  
US-A- 3 473 529  
US-A- 3 610 236  
US-A- 3 827 440  
US-A- 4 029 093

(73) Proprietor : AMBU INTERNATIONAL A/S  
Søndre Ringvej 49  
D-2600 Glostrup (DK)

(72) Inventor : Köhnke, Ole Björn  
Hjortekrogen 7  
DK-2800 Lyngby (DK)

(74) Representative : Patentanwälte Leinweber &  
Zimmermann  
Rosental 7/II Aufg.  
W-8000 München 2 (DE)

EP 0 367 285 B1

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Jouve, 18, rue Saint-Denis, 75001 PARIS

BEST AVAILABLE COPY

## Description

This invention relates to a disposable resuscitator comprising an elastically squeezable elongated bag having a first opening, a first one-way valve for intake of oxygen-containing air mounted in said first opening, a second opening which is in airtight connection with a valve housing comprising a pipe stub, which can be connected with a facial mask, and an outlet opening for exhalation air, the valve housing containing a two-way valve comprising a valve seat and a disc shaped valve body of an elastomeric material, said valve allowing oxygen-containing air to flow from the bag into the pipe stub when the pressure within the bag exceeds atmospheric pressure and exhalation air to flow from said pipe stub to the outlet opening when the pressure within the bag is lower than the pressure within the pipe stub.

A re-usable resuscitator constructed essentially as described above is well known cf. i.a. DK -A-151.288. This known resuscitator comprises i.a. a squeeze bag comprising a self-expanding foldable insert.

When such a known resuscitator has been used for the treatment of one patient and is to be used for the treatment of another patient it must be dismantled, cleaned and disinfected. Since this is a time-consuming operation and it further involves the risk that the resuscitator is re-assembled incorrectly there is a growing interest for limiting the use of such a resuscitator to one person only and discarding it after use.

This has created a need for the development of simple and inexpensive but yet reliable resuscitators.

It has been proposed to use squeeze bags without an insert and consisting of a plastics material and to reduce the freight costs the bags of some of the known apparatus have an annular folding zone of a reduced wall thickness so as to allow one end of the elongated bag to be folded into the remaining part of the squeeze bag. A resuscitator comprising such a foldable squeeze bag is disclosed in DE -A-1.616.421.

The pipe stub of the known disposable resuscitators is located co-axially and parallel with the longitudinal axis of the squeeze bag and it is consequently necessary to provide an angled connecting piece between said pipe stub and the facial mask so as to allow the resuscitator to be operated by a single person by performing a rhythmic compression of the the bag with one hand and by maintaining the mask in contact with the patient's face in such a manner that it covers both the nose and the mouth with the other hand.

DE -A-1.277.520 discloses a re-usable resuscitator having a valve housing located partly within the squeeze bag. The valve housing of the known resuscitator consists of two valve parts which are pressed together and which at their periphery form a flange

fitting into a corresponding groove on the inner side of the bag opening. The two-way valve located within the valve housing described consists of a circular valve disc having a centrally located pin attached to a perforated valve seat forming part of one of the two valve parts. The interior surface of the other valve part comprises an annular bead provided around the outlet opening of the valve and effectively preventing oxygen-containing gas from leaking through the outlet opening of the valve. The valve housing of the known resuscitator also comprises a pipe stub extending parallel with the longitudinal axis of the squeeze bag.

Other examples of resuscitator with similar types of two-way valve are described in US-A- 3 610 236 and in GB-A- 2 139 099.

The resuscitator of the invention is characterized in that the valve housing has the shape of a pipe of a transparent material, that the disc-shaped elastomeric valve body comprises a centrally located guide pin, which is mounted axially displaceable in a hole in the valve seat, that a hollow member having a central passage forming said outlet opening is mounted in the free end of the transparent pipe, said central passage being surrounded by an annular bead mounted co-axially and in contact with the valve body, and that the pipe stub to be connected with a mask extends from the side of the transparent pipe and is connected with the zone located between the valve body and the hollow member located in the free end of the transparent pipe.

Thus, the valve assembly comprises three components only, viz. the transparent pipe comprising a valve seat and a pipe stub, the valve body which is displaceable relative to the valve seat, and the hollow member having a central passage mounted in the free end of the transparent pipe.

These three relatively simple components can easily be assembled and consequently the production costs and the costs of assembling are relatively small. Furthermore, the use of a transparent pipe and the central guide pin projecting from the valve body presents the advantage that the operator by visually following the movements of the pin can ascertain that the valve functions correctly.

Thus, the pin moves away from the squeeze bag when oxygen containing gas flows from the squeeze bag to the patient and in the opposite direction when exhalation air flows from the patient and towards the outlet opening.

The hollow member located in the free end of the transparent pipe is preferably provided with an external thread corresponding to a thread on the inner side of the pipe at its free end. Such threads facilitate the dismantling of said member if vomitus is to be quickly removed from the valve chamber.

In order to facilitate the flow of exhalation air from the pipe stub located on the side of the transparent

pipe to the outlet opening, the valve seat is preferably convex when seen from the free end of the transparent pipe. Such a shape permits the disc-shaped valve body to move away from the body inserted in the free end of the transparent pipe during the intake of breathing gas into the squeeze bag thus increasing the cross sectional area of the passage in which the exhalation air flows towards the outlet opening.

In a preferred embodiment of the resuscitator of the invention the edge of the second opening in the squeeze bag is preferably placed in an annular groove provided on the exterior side of the transparent pipe in a stretched state so as to obtain an airtight connection between the transparent pipe and the squeeze bag and simultaneously allowing the transparent pipe to be rotated relatively to the squeeze bag.

A particularly preferred embodiment of the resuscitator of the invention comprises a strap attached to the exterior side of the squeeze bag. This strap is preferably of such a length that an operator can introduce a hand into the zone between the exterior side of the squeeze bag and the inner side of the strap and thus is able to hold the resuscitator and simultaneously subjecting the squeeze bag to rhythmic compressions.

When using a pear-shaped squeeze bag one end of the strap is preferably attached to the squeeze bag close to the end of the squeeze bag comprising the first opening and the opposite end of the strap is attached to the squeeze bag in a zone located halfway between the opposite end of the squeeze bag and the zone having the largest diameter.

By attaching the strap to the squeeze bag in this manner the squeeze bag will rapidly expand, because the strap will generate a pull following the compression of the squeeze bag with a hand located under said strap.

The one-way valve provided in the first opening in the squeeze bag is preferably a flap valve mounted on the interior side of the squeeze bag. The flap valve may comprise a circular elastic disc which is attached to a perforated valve seat by means of a centrally located pin.

The one-way valve is preferably combined with a housing which extends outwardly from the one-way valve and is open at its free end and which is adapted to cooperate with a holder connected to a collapsible bag, two one-way valves being provided in the side walls of the housing, the first one-way valve allowing air to flow into the housing when a predetermined vacuum has been established in said housing and the second one-way valve allowing gas to flow out of the housing when a predetermined superatmospheric pressure has been established therein, and a pipe stub which can be connected with a source of oxygen-containing gas.

The oxygen-containing gas which may be intro-

duced into the housing through said pipe stub is preferably pure oxygen, e.g. supplied from a pressure vessel. When supplying oxygen directly from a pressure vessel to the inhalation air in the bag there is a risk of creating such a superatmospheric pressure in the air passages of a patient that it may endanger the patient. Such a risk is eliminated with the embodiment defined above. Thus, by introducing oxygen under pressure into the housing described through the pipe stub the oxygen will fill the collapsible bag and expand it. When the pressure within said bag exceeds the predetermined value the oxygen will start flowing out of the collapsible bag through the second one-way valve.

Following compression of the squeeze bag the latter will expand and a vacuum is generated within said bag. This vacuum will spread into the housing and oxygen will be sucked into the squeeze bag from the collapsible bag. At the same time the first one-way valve will open thus permitting air to flow into the housing. By repeated use of the resuscitator a mixture of air and oxygen in a ratio determined by the oxygen flow and the compression volume and operational sequence of the squeeze bag will be supplied to the patient.

The squeeze bag preferably comprises an annular folding zone located at such a distance from the second opening of the squeeze bag that the intermediate portion of the bag and the transparent pipe can be folded into that portion of the squeeze bag which is located between the folding zone and the first opening in the squeeze bag.

The folding zone preferably is a zone of reduced thickness delimited by two annular grooves provided in the exterior side of the squeeze bag.

The invention will now be described in further detail with reference to the drawing in which

Fig. 1 shows a side view of a preferred embodiment of the resuscitator of the invention,

Fig. 2 shows a longitudinal sectional view of the resuscitator shown in Fig. 1 perpendicularly to the plane of the paper,

Fig. 3 shows a side view partly in section of a resuscitator of the invention in a folded state,

Fig. 4 shows an enlarged sectional view of the valve arrangement at the left end of the resuscitator shown in Fig. 2 and

Fig. 5 shows an enlarged sectional view of the valve arrangement at the right end of the resuscitator shown in Fig. 2.

In the drawing 1 defines an elongated elastically compressible squeeze bag which is circular in cross section and which comprises an annular folding zone 2 of reduced wall thickness, said folding zone 2 being delimited by two annular and parallel grooves 3 on the outside of the squeeze bag 1. The resuscitator also comprises a strap 4 which is attached to the squeeze bag 1 at its ends.

The squeeze bag comprises an opening at each end, the first opening having intake means 5 and the second opening having a transparent pipe 6 inserted therein.

The intake means 5 consists of a circular disc 7 having along its periphery an annular groove which surrounds the edge of the opening, said edge being maintained in the groove 8 in a stretched state. The central part of the disc 7 has the shape of a valve seat with holes which holes are covered by a thin circular elastic valve flap 10 located on the interior side of the disc 7 and being attached to the valve seat by a centrally located pin 11. The exterior side of the disc 7 is integral with a housing 12 having two parallel side walls 13 with holes 14, said side walls forming valve seats for an intake valve mounted on the inside of the housing 12 and a relief valve mounted on the outside of the housing 12, respectively.

The intake valve comprises in addition to the holes 14 a thin circular valve flap 15 which is attached to the valve seat by a pin 16. Similarly, the relief valve comprises another thin circular valve flap 17 which is attached to the valve seat by means of a pin 18. The housing 12 is open at the end opposite to the disc 7 and in the embodiment shown in the drawing a holder 19 which overlaps the edges of a disc 20 attached to the mouth of a thin plastic bag 21 is attached to the free end of the housing 12. The holder 19 surrounds the housing 12 and the holder walls comprise holes 22 for intake and discharge of air and oxygen-containing gas, respectively.

The housing 12 also comprises a pipe stub 23 for attachment of a tube for the supply of oxygen to the housing.

The transparent pipe 6 comprises at one end an annular groove 30 surrounding the edge of the second opening in the squeeze bag 1, said edge being in a stretched state. A hollow member 31 having a central passage 32 surrounded by an annular bead 33 is screwed into the opposite end of the pipe 6. When there is an atmospheric or superatmospheric pressure within the squeeze bag 1, the bead 33 is in contact with a flexible elastic circular valve flap 34 having a central pin 35 which is inserted in a hole in a convex valve seat 36 with holes 37. The pin 35 is axially displaceable in the hole mentioned above and the movement in a direction away from the valve seat is restricted by a shoulder 38 on the pin 35. The pin 35 has a free end 39 and the movement of said end 39 can be observed through the wall of the transparent pipe 6.

The branch pipe 40 is provided on the side of the transparent pipe 6 and the interior of the branch pipe 40 communicates through a hole 41 in the pipe wall with a space 42 which on one hand is delimited by the valve flap 34 and on the other hand by the hollow body 31.

As will appear from Fig. 3 the resuscitator can be

folded and placed in such a manner that it almost totally fills the interior of a box.

The resuscitator shown can be operated in the following manner:

After having placed a hand in such a manner that the strap 4 overlaps the hand the user is capable of subjecting the squeeze bag 1 to rhythmic compressions with one hand only. The compression of the squeeze bag 1 produces a gas flow from the squeeze bag 1 into the transparent pipe 6. The pressure increase thus produced causes the valve member 34 to be displaced relative to the valve seat 36 and to be pressed against the annular bead 33 thus permitting the gas to flow through the openings 37 in the valve seat 36 into the space 42 and from said space through the hole 41 and the pipe stub 40 towards a mask (not shown) connected with said pipe stub 40.

When the compression of the squeeze bag 1 ceases, the bag 1 will tend to regain its original shape which tendency is supported by the tension generated by the strap 4. During the expansion of the squeeze bag 1 the pressure within said bag drops to a subatmospheric pressure and the valve body 34 will be pressed against the valve seat 36 so as to allow exhalation air to flow through the pipe stub 40, the hole 41, the space 42 and the central passage 32. Simultaneously, the superatmospheric pressure exerted on the exterior side of the valve body 10 will allow intake of air from the housing 12 through the holes 9 in the disc 7.

When the pipe stub 23 is connected with a source of pressurized oxygen, the oxygen will flow constantly into the housing 12 and into the bag 21. When the bag 21 has been filled with oxygen and a slight superatmospheric pressure has been established therein, the relief valve in the housing 12 will open and excessive oxygen will flow out of the housing through the holes 14 and out through the holes 22 in the holder 19. Thus, during the expansion of the squeeze bag 1 oxygen will flow into said squeeze bag until there is no more oxygen present in the bag 21. At this stage the vacuum established in the housing 12 will open the intake valve of the housing 12 and air is caused to flow into the housing 12 through the holes 14 of the intake valve.

By using the resuscitator illustrated inhalation air having a desired oxygen concentration of between 21 and 100% can be supplied to a patient.

#### Claims

1. A disposable resuscitator comprising an elastically squeezable elongated bag (1) having a first opening, a first one-way valve for intake of oxygen-containing air mounted in said first opening, a second opening which is in airtight connection with a valve housing comprising a pipe stub (40)

- which can be connected with a facial mask, and an outlet opening for exhalation air, the valve housing containing a two-way valve comprising a valve seat (36) and a disc-shaped valve body (34) of an elastomeric material, said valve allowing oxygen-containing air to flow from the bag into the pipe stub (40) when the pressure within the bag exceeds atmospheric pressure and exhalation air to flow from said pipe stub to the outlet opening when the pressure within the bag is lower than the pressure within the pipe stub, characterized in that the valve housing has the shape of a pipe (6) of a transparent material, in that the disc-shaped elastomeric valve body (34) comprises a centrally located guide pin (35) which is mounted axially displaceable in a hole in the valve seat, in that a hollow member (31) having a central passage (32) forming said outlet opening is mounted in the free end of the transparent pipe, said central passage being surrounded by an annular bead (33) mounted co-axially and in contact with the valve body, and in that the pipe stub to be connected with a mask extends from the side of the transparent pipe and is connected with the zone located between the valve body and the hollow member located in the free end of the transparent pipe (6).
2. A resuscitator according to claim 1, characterized in that the hollow member (31) mounted in the free end of the transparent pipe (6) comprises an external thread corresponding to a thread on the inner side of the pipe at its free end.
  3. A resuscitator according to claim 1 or 2, characterized in that the valve seat is convex viewed in a direction away from the free end of the transparent pipe.
  4. A resuscitator according to any of the claims 1-3, characterized in that the edge of the second opening in the squeeze bag is located in an annular groove (30) on the outer side of the transparent pipe in a stretched state.
  5. A resuscitator according to any of the preceding claims, characterized in that a strap (4) is attached to the outer side of the squeeze bag.
  6. A resuscitator according to claim 5 comprising a pear-shaped squeeze bag, characterized in that one end of the strap is attached to the bag close to the end comprising the first opening, and that the opposite end of the strap is attached to the squeeze bag halfway between the opposite end of the squeeze bag and the zone having the largest diameter.

7. A resuscitator according to any of the preceding claims, characterized in that the first one-way valve located in the first opening of the squeeze bag comprises a housing extending outwardly from the valve and being open at its free end, said free end carrying a holder with a compressible bag attached thereto, the side walls of the housing comprising two holes, a second and a third one-way valves mounted in each hole, said second one-way valve permitting intake of air when the predetermined vacuum has been established in the housing and said third one-way valve permitting discharge of gas from the housing when the pressure therein exceeds a predetermined value, said housing further comprising a pipe stub for supplying oxygen-containing gas to the housing.
8. A resuscitator according to any of the preceding claims, characterized in that the squeeze bag (1) comprises an annular folding zone (2) which is located at such a distance from the second opening in the squeeze bag that the part of the squeeze bag which is located between the transparent pipe and the folding zone as well as the transparent pipe can be folded into the remaining part of the squeeze bag.

#### Patentansprüche

1. Einweg-Wiederbelebungs Vorrichtung mit einem elastischen zusammendrückbaren länglichen Balg (1) mit einer ersten Öffnung, einem in der ersten Öffnung angebrachten ersten Einwegeventil zum Einlaß von sauerstoffhaltiger Luft, einer zweiten Öffnung, die luftdicht mit einem Ventilgehäuse mit einem Rohrstumpf (40) der mit einer Gesichtsmaske verbunden werden kann verbunden ist und einer Auslaßöffnung für ausgeatmete Luft, wobei das Ventilgehäuse ein Zwewegeventil mit einem Ventilsitz (36) und einem scheibenförmigen Ventilkörper (34) aus einem Elastomer material enthält, und das Ventil sauerstoffhaltiger Luft von dem Balg in den Rohrstumpf (40) zu strömen erlaubt, wenn der Druck innerhalb des Balgs atmosphärischen Druck überschreitet und der ausgeatmeten Luft von dem Rohrstumpf zu der Auslaßöffnung zu strömen erlaubt, wenn der Druck innerhalb des Balges geringer ist als der Druck innerhalb des Rohrstumpfes, dadurch gekennzeichnet, daß das Ventilgehäuse die Form eines Rohres (6) aus einem transparenten Material hat, daß der scheibenförmige Elastomerventilkörper (34) einen zentral gelegenen in einem Loch des Ventilsitzes axial verschieblich angebrachten Führungsstift (35) aufweist, daß ein hohles Teil (31) mit einem die Auslaßöffnung bil-

- denden Durchgang (32) an dem freien Ende des transparenten Rohres angebracht ist, wobei der zentrale Durchgang von einer koaxial zu dem Ventilkörper und diesen berührend angebrachten, ringförmigen Verstärkungsrippe (33) umgeben ist, und dadurch, daß der mit einer Maske zu verbindende Rohrstumpf sich von der Seite des transparenten Rohres ausgehend erstreckt und mit dem zwischen dem Ventilkörper und dem an dem freien Ende des transparenten Rohres (6) gelegenen hohlen Teil gelegenen Gebiet verbunden ist.
2. Wiederbelebungs Vorrichtung nach Anspruch 1, dadurch gekennzeichnet, daß das an dem freien Ende des transparenten Rohres (6) angebrachte hohle Teil (31) ein einem Gewinde an der Innenseite des Rohres an dessen freien Ende entsprechendes äußeres Gewinde aufweist.
3. Wiederbelebungs Vorrichtung nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß der Ventil-sitz in Richtung weg von dem freien Ende des transparenten Rohres betrachtet konvex ist.
4. Wiederbelebungs Vorrichtung nach einem der Ansprüche 1 bis 3, dadurch gekennzeichnet, daß der Rand der zweiten Öffnung des Preßbalgs im ausgedehnten Zustand in einer ringförmigen Nut (30) an der Außenseite des transparenten Rohres angeordnet ist.
5. Wiederbelebungs Vorrichtung nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß ein Gurt (4) an der Außenseite des Preßbalgs angebracht ist.
6. Wiederbelebungs Vorrichtung nach Anspruch 5 mit einem birnenförmigen Preßbalg, dadurch gekennzeichnet, daß ein Ende des Gurts in der Nähe des die erste Öffnung aufweisenden Endes des Balgs angebracht ist und daß das entgegengesetzte Ende des Gurts auf dem halben Weg zwischen dem entgegengesetzten Ende des Preßbalgs und dem Gebiet mit dem größten Durchmesser an dem Preßbalg angebracht ist.
7. Wiederbelebungs Vorrichtung nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß das in der ersten Öffnung des Preßbalgs gelegene erste Einwegeventil ein Gehäuse aufweist, das sich von dem Ventil nach außen erstreckt und an seinem freien Ende offen ist, wobei das freie Ende einen Halter mit einem daran angebrachten zusammenpreßbaren Balg trägt, die Seitenwände des Gehäuses zwei Löcher aufweisen, ein zweites und ein drittes Einwegeventil jeweils in einem Loch angebracht ist,

das zweite Einwegeventil den Einlaß von Luft erlaubt, wenn das bestimmte Vakuum in dem Gehäuse hergestellt worden ist, und das dritte Einwegeventil den Auslaß von Gas aus dem Gehäuse erlaubt, wenn der Druck darin einen bestimmten Wert überschreitet, das Gehäuse weist weiterhin einen Rohrstumpf zur Lieferung sauerstoffhaltigen Gases an das Gehäuse auf.

8. Wiederbelebungs Vorrichtung nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß der Preßbalg (1) ein ringförmiges Faltgebiet (2) aufweist, das in einer solchen Entfernung von der zweiten Öffnung in dem Preßbalg angeordnet ist, daß der zwischen dem transparenten Rohr und der Faltzone gelegene Teil des Preßbalgs sowie das transparente Rohr in den verbleibenden Teil des Preßbalgs gefaltet werden kann.

#### Revendications

1. Appareil de réanimation comprenant un sac allongé (1) pouvant être comprimé de manière élastique, présentant une première ouverture, une première valve unidirectionnelle pour l'entrée de l'air contenant de l'oxygène montée dans ladite première ouverture, une deuxième ouverture qui est reliée, par un raccordement étanche à l'air, à une boîte de valve comprenant une tubulure (40) qui peut être raccordée à un masque facial et une ouverture de sortie pour l'air expiré, la boîte de valve contenant une valve bi-directionnelle comprenant un siège de valve (36) et un corps de valve en forme de disque (34) conçu en un matériau élastomère, ladite valve permettant à l'air contenant de l'oxygène de s'écouler depuis le sac dans la tubulure (40), lorsque la pression régnant à l'intérieur du sac est supérieure à la pression atmosphérique, et permettant à l'air expiré de s'écouler depuis ladite tubulure en direction de l'ouverture de sortie, lorsque la pression à l'intérieur du sac est inférieure à la pression régnant à l'intérieur de la tubulure, caractérisé en ce que la boîte de valve a la forme d'un tuyau (6) d'un matériau transparent, en ce que le corps de valve élastomère (34) en forme de disque comprend en son centre une tige de guidage (35) qui est montée dans le sens axial et peut se déplacer dans un trou ménagé dans le siège de valve, en ce qu'un organe creux (31), présentant un passage central (32) formant ladite ouverture de sortie, est fixé dans l'extrémité libre du tuyau transparent, ledit passage central étant entouré par un bourrelet annulaire (33) fixé de manière coaxiale par rapport au corps de valve et en contact avec ce dernier et en ce que la tubulure prévue pour

- être reliée à un masque s'étend depuis le côté du tuyau transparent et est reliée à la zone placée entre le corps de valve et l'organe creux placé dans l'extrémité libre du tuyau transparent (6).
2. Appareil de réanimation selon la revendication 1, caractérisé en ce que l'organe creux (31) fixé dans l'extrémité libre du tuyau transparent (6) comprend un filetage externe correspondant à un filetage sur le côté interne du tuyau, au niveau de son extrémité libre. 10
  3. Appareil de réanimation selon la revendication 1 ou la revendication 2, caractérisé en ce que le siège de valve est convexe dans le sens opposé à l'extrémité libre du tuyau transparent. 15
  4. Appareil de réanimation selon l'une quelconque des revendications 1 à 3, caractérisé en ce que le bord de la deuxième ouverture ménagée dans le sac pouvant être comprimé vient se loger dans une gorge annulaire (30) sur le côté extérieur du tuyau transparent, dans un état étiré. 20
  5. Appareil de réanimation selon l'une quelconque des revendications précédentes, caractérisé en ce qu'un étrier de fixation (4) est fixé au côté extérieur du sac pouvant être comprimé. 25
  6. Appareil de réanimation selon la revendication 5, comprenant un sac pouvant être comprimé, en forme de poire, caractérisé en ce qu'une extrémité de l'étrier de fixation est fixé au sac, à proximité de l'extrémité comprenant la première ouverture, et en ce que l'extrémité opposée de l'étrier est fixée au sac pouvant être comprimé, à mi-chemin entre l'extrémité opposée du sac pouvant être comprimé et la zone présentant le diamètre supérieur. 30 35 40
  7. Appareil de réanimation selon l'une des revendications précédentes, caractérisé en ce que la première valve unidirectionnelle placée dans la première ouverture du sac pouvant être comprimé comprend une boîte s'étendant vers l'extérieur, à partir de la valve, et étant ouverte au niveau de son extrémité libre, ladite extrémité libre supportant un dispositif de support auquel est fixé un sac compressible, les parois latérales de la boîte comprenant deux trous, une deuxième et une troisième valves unidirectionnelles montées, chacune, dans chaque trou, ladite deuxième valve unidirectionnelle permettant l'entrée de l'air une fois le vide prédéterminé établi dans la boîte et ladite troisième valve unidirectionnelle permettant la libération des gaz provenant de la boîte, lorsque la pression régnant dans cette dernière est supérieure à une valeur prédéterminée, ladite 45 50 55

boîte comprenant, en outre, une tubulure pour alimenter la boîte en gaz contenant de l'oxygène.

8. Appareil de réanimation selon l'une quelconque des revendications précédentes, caractérisé en ce que le sac pouvant être comprimé (1) comprend une zone de pliage annulaire (2) qui est située à une distance telle de la deuxième ouverture ménagée dans le sac pouvant être comprimé que la partie du sac pouvant être comprimé, qui est située entre le tuyau transparent et la zone de pliage, ainsi que le tuyau transparent, peuvent être repliés dans la partie restante du sac pouvant être comprimé.

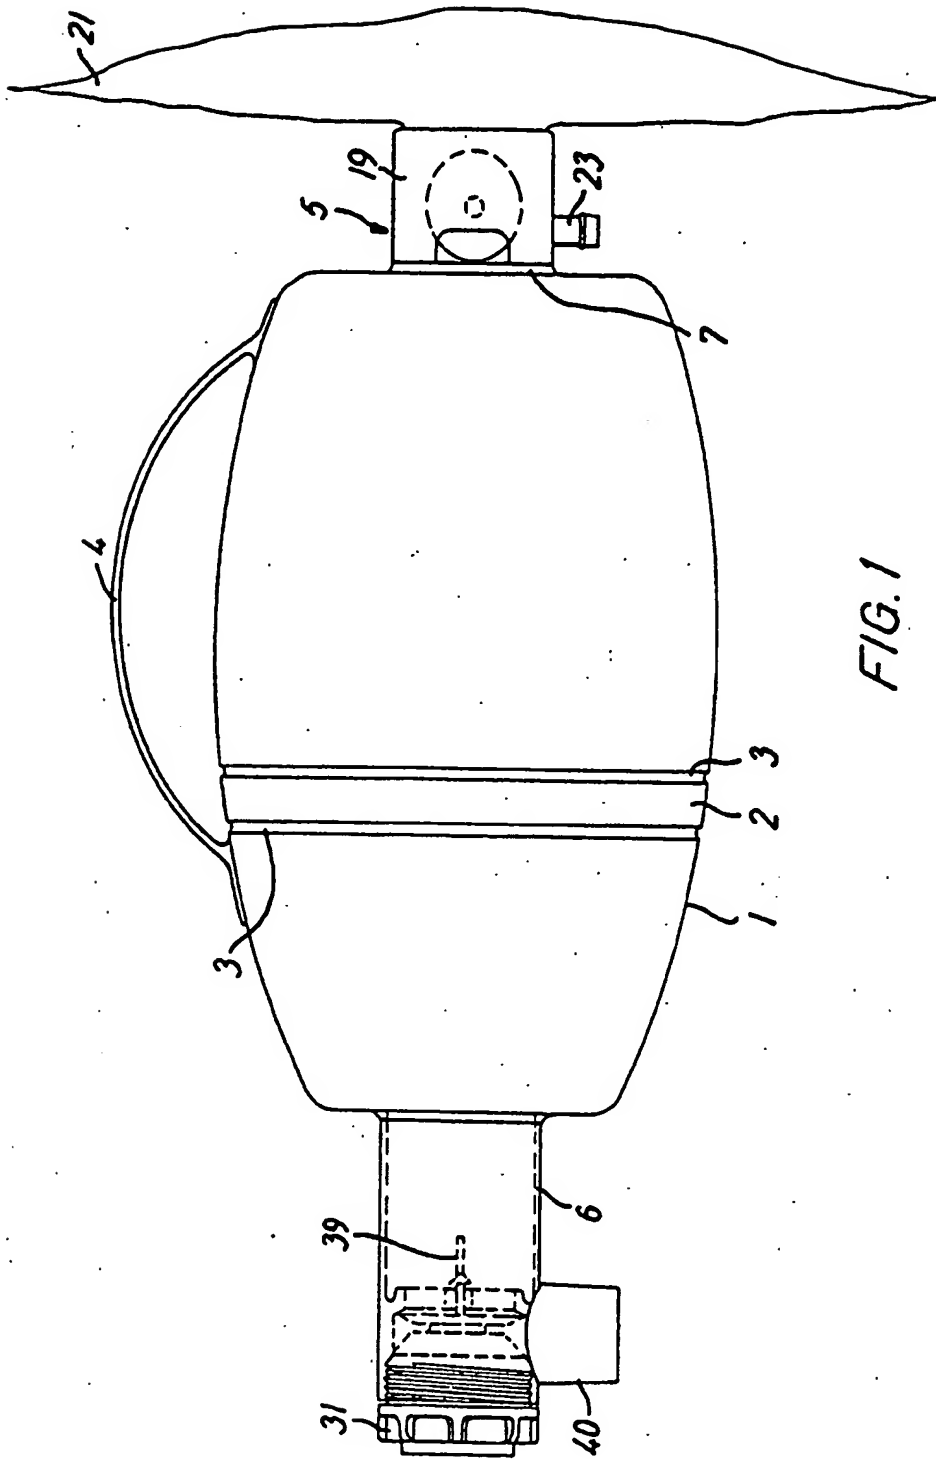


FIG. 1



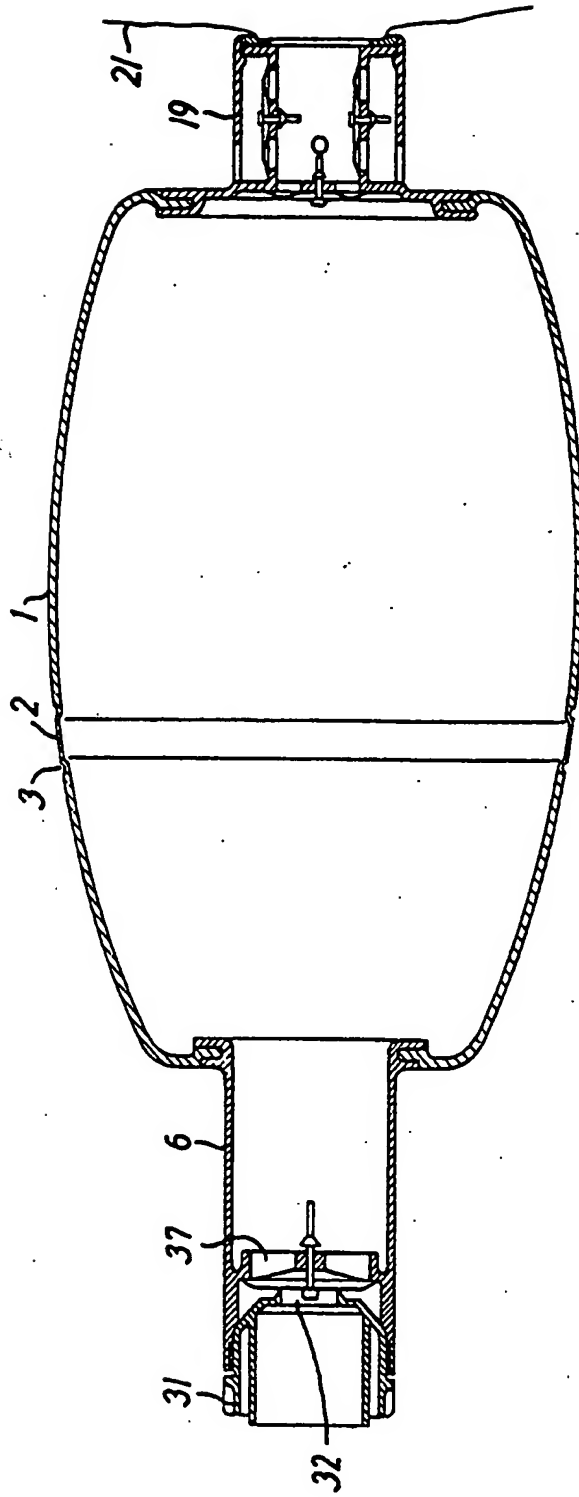


FIG. 2

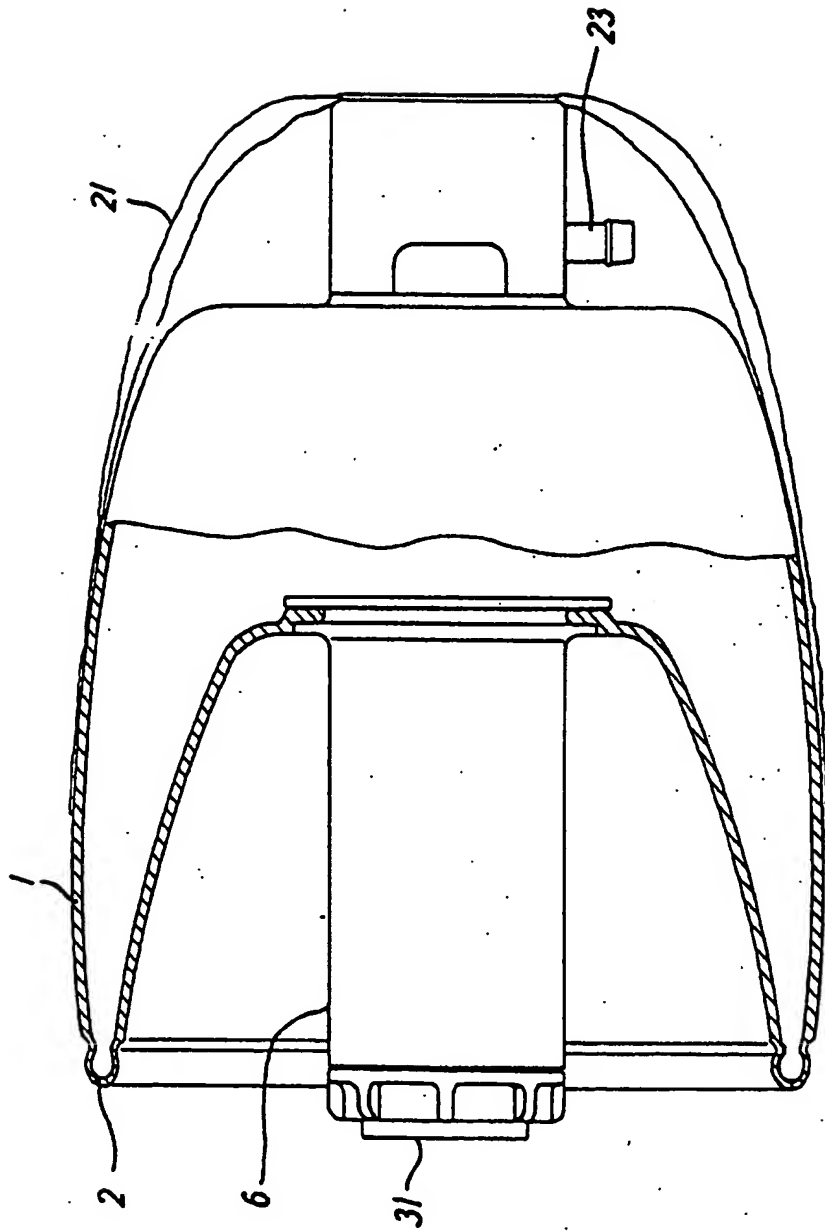


FIG. 3

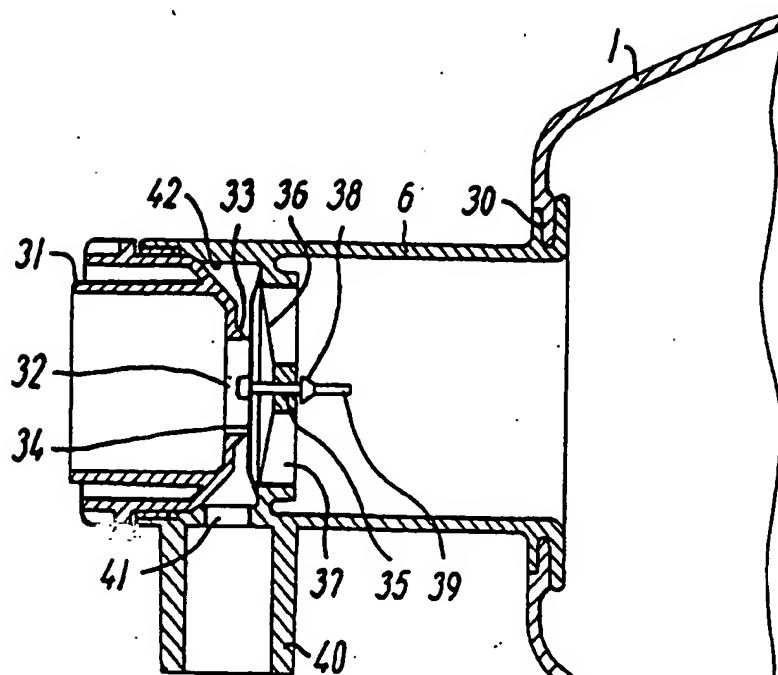


FIG. 4

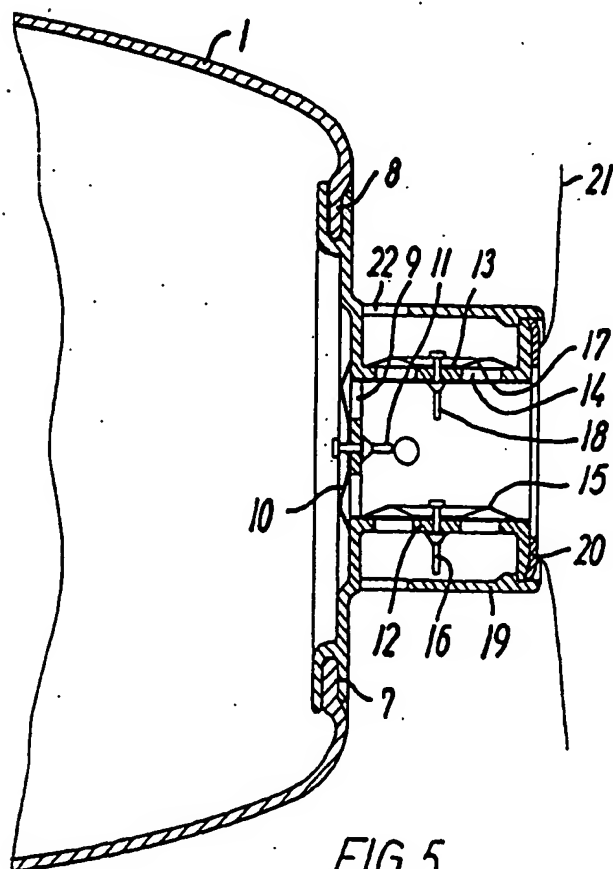


FIG. 5

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**